Philips HearLink 9060 overview

miniRITE R & miniFit Detect



The HearLink 9060 miniRITE R offers premium sound quality in an exclusive Philips design:

- **SoundMap 4** – With AI Dynamic Directionality and AI Noise Reduction for better hearing in noise
- **SoundGuide** – A motion sensor that automatically adjusts the level of directionality and noise reduction based on the movement of the user
- **Unique rechargeable style** – Including a telecoil and smart speaker system
- **Single push-button** – Intuitive and easy to use
- **LED** – For better visibility when hearing aid is turned on or charging
- **Bluetooth® LE Audio** – Supporting LE Audio compatible devices and Auracast™ broadcasts up to 48 kHz
- **Fast contact charging and long battery life** – Due to charging technology
- **CROS | BiCROS compatibility** - New CROS transmitter for single-sided deafness

miniFit Detect speakers

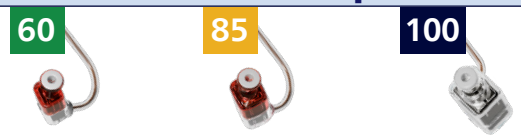

- The miniFit Detect system is an innovative, **smart** speaker system. It features an 8-pin connector with embedded memory.
- The memory identifies **serial number, fitting level, length and side (right/left)** - all of which can be detected by HearSuite fitting software to ensure the correct speaker is attached.

MicroShell Detect molds



- Custom molds for the miniFit Detect speakers include the standard MicroMold, LiteTip, and the MicroShell Detect.
- MicroShell Detect is a new custom earpiece available with the HearLink 9060 and 9050 miniRITE.
- Available in fitting levels 60, 85, 100 and 105 and in wire lengths 1-5.
- Speaker unit is fixed in mold and cannot be changed.

Standard miniFit domes

		60	85	100	
OpenBass dome	5 mm	●	–	–	
	6-12 mm	●	●	–	
Bass dome double	6-12 mm	●	●	●	
Bass dome single	6-12 mm	●	●	●	
Power dome	6-12 mm	●	●	●	

Measuring tool

- A **measuring tool** is available to measure the ear for both miniFit Detect speakers and previous miniFit speakers.
- Measure from the middle of the canal opening
- miniFit Detect 60 and 85 speakers are available in wire lengths 0–5.
- miniFit Detect 100 speaker is available in wire lengths 1–5.



Philips HearLink Charger Plus

- The Charger Plus for HearLink 9060 uses **contact** charging, offering a full day of power in just one hour, and a quick re-charge in just 15 minutes.
- Contact charging offers **faster** charging, a **smaller** charging device, and a more **reliable** charging experience for members.

Charging time (minutes)	Use time (hours)
15	4
30	8
60	16
120 (full)	20



900285 | 26.2 | US

© 2026 Demant. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.
The Auracast™ word mark and logos are trademarks owned by the Bluetooth SIG.